



Product Overview

The Adapta LED Exit Sign is available in 2 sizes with 20M or 30M viewing distance and is an ideal architectural signage solution for projects looking for high quality and discrete signage solutions. Both sizes are available in a white or black finish and the modular design allows for wall mount, ceiling mount, suspended, recessed or flagpole mount options. The Adapta exit sign is also provided with a full set of ISO Legends and a blanking panel for single sided applications. EC Signs directive legends are also available on request.

The Adapta range of Exit Signs are DALI-2 compatible as standard and offer both maintained and non-maintained operation. The DALI-2 versions are DiiA registered and are fully compliant with BSEN62034 providing automatic Self-Test or full DALI-2 operation when connected to a DALI control system. All versions offer 3 hours emergency lighting duration time from a Lithium Iron Phosphate (LiFePO₄) battery.




Product Features

- DALI-2 & self-test function as standard
- 6 mounting options – Ceiling, wall, suspended, flagpole, recessed & recessed suspended
- Full ISO or EC Signs directive Legend kits available
- 20M and 30M viewing distance options
- Maintained or non-maintained operation
- Polycarbonate housing
- White or black housing options
- Optional suspension and recess kits available to order separately
- Luminance selectable between 500cd/M² or 50cd/M² levels
- TUV Rhineland certified
- 5 years warranty


Additional Product Details

- | | |
|-------------------------|--|
| • Product | LED exit sign |
| • Sign viewing distance | 20m or 30m |
| • Dimensions | 20m = 200mm x 117mm x 37mm (LxWxH)
30m = 300mm x 167mm x 37mm (LxWxH) |
| • Construction | White or black polycarbonate body |

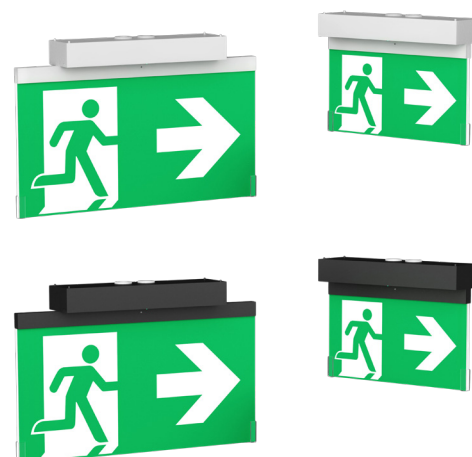


Dimensions


20M Ceiling Mounted

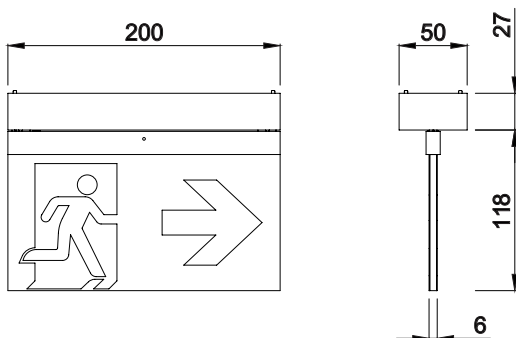


20M Wall Mounted

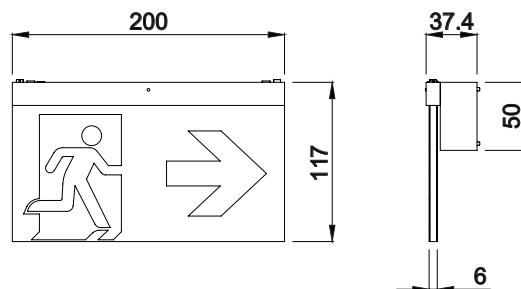


30M Ceiling Mounted

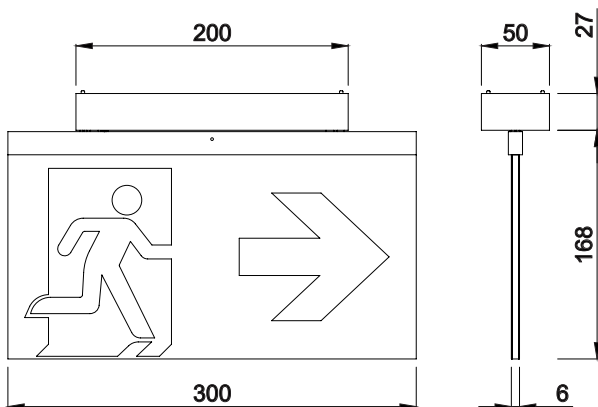

30M Wall Mounted

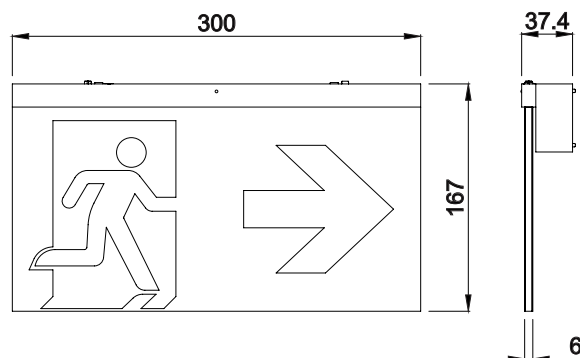

20M/30M Recessed Mounted

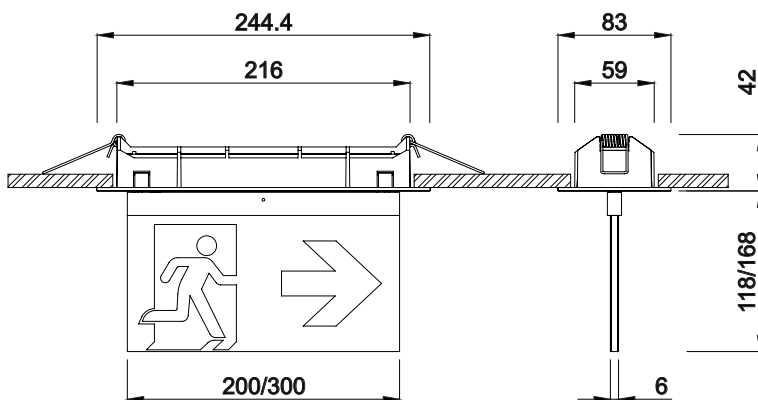

Technical Data

Rated supply voltage	220-240VAC
Mains frequency	50/60Hz
Starting time	<0.5s
Ambient temperature t_a	5-30°C
LED colour temperature	6500K
Insulation class	Class II
IP rating	IP20
Supply power max (Maintained)	2.5W
Supply power max (Non-Maintained)	1.8W
In-rush current	TBA
In-rush current duration	TBA
Mains surge capability (between L – N)	1KV
Battery	20M = 1x 3.2V 600mAh LiFePO4 30M = 1x 3.2V 1500mAh LiFePO4
Weight	20M = 340g / 30M = 560g



Mounting Options

Ceiling Mounted



Wall Mounted



Recessed Mounted



Suspended Mounted



*Flagpole Mounted




* Note: If flagpole version required please advise at time of ordering, as this product requires bespoke Legends.

Recessed Suspended Mounted



Mounting Accessories - Recess kit for 20m/30m

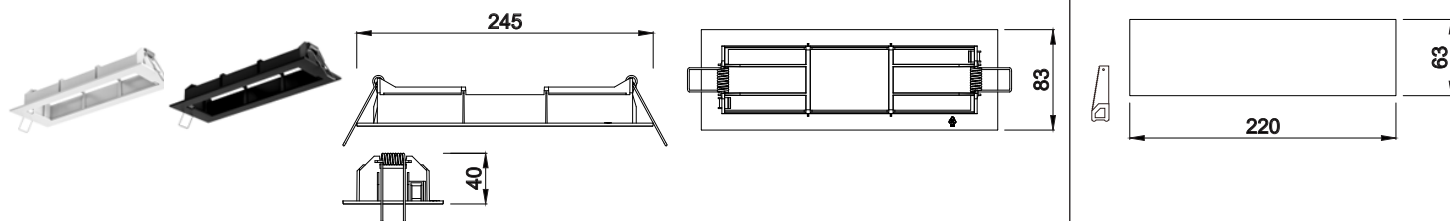

Mounting Accessories - Suspension kit for 20m/30m



Order Codes

Description

AD20/D2/WH	Adapta 20M Exit Sign, Wall/Ceiling Mount, DALI-2, White
AD20/D2/BL	Adapta 20M Exit Sign, Wall/Ceiling Mount, DALI-2, Black
AD30/D2/WH	Adapta 30M Exit Sign, Wall/Ceiling Mount, DALI-2, White
AD30/D2/BL	Adapta 30M Exit Sign, Wall/Ceiling Mount, DALI-2, Black
Accessories	
AD/RECKIT/WH	Adapta Recess Kit, White
AD/RECKIT/BL	Adapta Recess Kit, Black
AD/SUSP	Adapta Suspension Kit (1.0M)
AD/RECSUSP/WH	Adapta Recessed Suspension Kit, White
AD20/LEGKIT/EC	Adapta 20M EC Signs Directive Legend kit
AD30/LEGKIT/EC	Adapta 30M EC Signs Directive Legend kit

Product Standards

EN IEC60598-1	EN IEC61347-1	EN 61000-3-3	EN 55015
EN IEC60598-2-1	EN IEC61347-2-7	EN 61547	ROHS 2.0
EN IEC60598-2-22	EN IEC61347-2-13	EN 62034	DALI standard EN 62386-202
ISO3864-Parts 1&3&4	EN 61000-3-2		