



Product Overview

The ExiBlade LED Exit Sign has a viewing distance of 30M making it ideal for office, retail and public sector applications where clear signage is required. With both white and black finishes available the ExiBlade is suited for most building decors and the suspension and recess accessories make it adaptable for installation in a wide range of areas. The ExiBlade has been designed to be contractor friendly with a first fix bracket for electrical connections. This makes it simple to install and to continue on that theme the ExiBlade is also provided with a full set of ISO legends and a blanking panel for both single and double sided applications. If EC Signs directive legends are required these are also available on request.

The ExiBlade range is available with either Manual Test or DALI-2/Self-Test options and offer both maintained and non-maintained operation. The DALI-2 versions are DiiA registered and are fully compliant with BSEN62034 providing automatic Self-Test or full DALI-2 operation when connected to a DALI control system. All versions offer 3 hours emergency lighting duration time from a Lithium Iron Phosphate (LiFePO4) battery.




Product Features

- Manual Test and DALI-2/Self-Test options
- Mounting options – Ceiling, Wall, Suspended and Recessed
- Full ISO or EC Signs Directive Legend Kits available
- 30M viewing distance
- Maintained or Non-Maintained operation
- Polycarbonate housing
- White or black housing options
- Optional suspension and recess kits available to order separately
- 5 years Warranty

Additional Product Details

- | | |
|-------------------------|-----------------------------------|
| • Product | LED exit sign |
| • Sign viewing distance | 30m |
| • Dimensions | 332mm x 42mm x 221mm (LxWxH) |
| • Construction | White or black polycarbonate body |

Dimensions

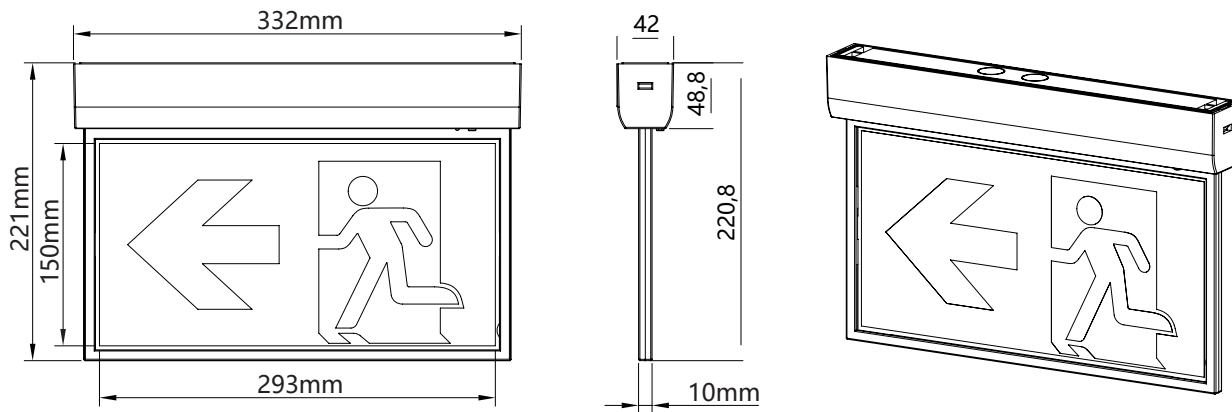

Technical Data

Rated supply voltage	220-240VAC
Mains frequency	50/60Hz
Starting time	<0.5s
Ambient temperature t_a	0°C-+45°C
LED colour temperature	5700K
Insulation class	Class II
IP rating	IP40
Power consumption	Manual Test: 3.5W max DALI-2: 4W max.
Recharge / discharge time	24 hours recharge, 1 hour and 3 hours discharge
Battery	DALI-2: LiFePO4 26650 3.2V 3200mAh
Test facility	Manual test and Self-Test/DALI-2
Operation	Maintained and Non-maintained
Viewing Distance	30m

Mounting Options

Ceiling/Wall Mounted




Recessed Mounted





Suspended Mounted



Mounting Accessories - Recess kit

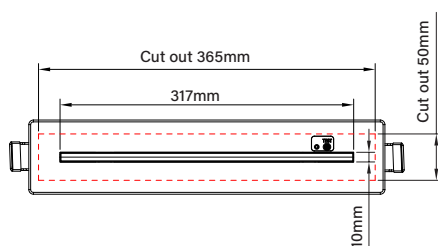

Recessed kit cut out dimension
365mm x 50mm

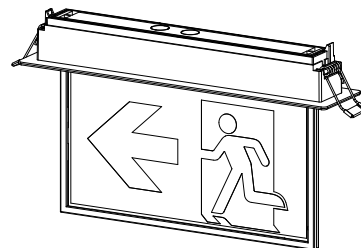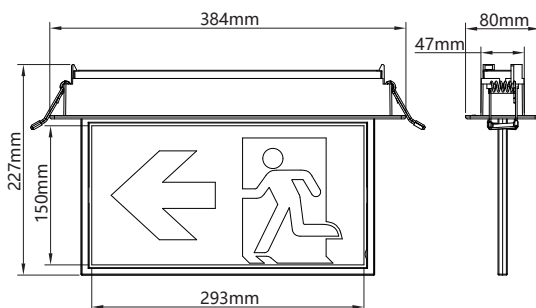

Mounting Accessories - Suspension kit



Order Codes

Description

EXI/MT/WH	ExiBlade 30M Exit Sign, Wall/Ceiling Mount, Manual Test, White
EXI/MT/BL	ExiBlade 30M Exit Sign, Wall/Ceiling Mount, Manual Test, Black
EXI/D2/WH	ExiBlade 30M Exit Sign, Wall/Ceiling Mount, DALI-2/Self-Test, White
EXI/D2/BL	ExiBlade 30M Exit Sign, Wall/Ceiling Mount, DALI-2/Self-Test, Black
Accessories	
EXI/RECKIT/WH	ExiBlade Recess Kit, White
EXI/RECKIT/BL	ExiBlade Recess Kit, Black
EXI/SUSP	ExiBlade Suspension Kit (1.0M)
EXI/LEGKIT/EC	ExiBlade 30M EC Signs Directive legend kit

Product Standards

EN IEC60598-1	EN IEC61347-1	EN 61000-3-3	EN 55015
EN IEC60598-2-1	EN IEC61347-2-7	EN 61547	ROHS 2.0
EN IEC60598-2-22	EN IEC61347-2-13	EN 62034	DALI standard EN 62386-202
ISO3864-Parts 1&3&4	EN 61000-3-2		