



Product Overview

The Protexa LED Exit Sign is a wall mounted exit sign that is provided with a full set of ISO legends and has a viewing distance of 30M. The Protexa also has a built-in downlight that can be activated or left switched off during installation. The Protexa housing has 20mm cable entries available at both ends, centrally and on the rear of the housing making installation flexible. Available in white or black housings makes the Protexa a great choice for various installations.

The Protexa Exit Sign is available as a combined Manual Test/Self-Test or DALI-2 version and offers both maintained and non-maintained operation. The DALI-2 versions are DiiA registered and are fully compliant with BSEN62034 providing automatic Self-Test or full DALI-2 operation when connected to a DALI control system. All versions offer 3 hours emergency lighting duration time from a Lithium Iron Phosphate (LiFePO4) battery.



Black Available
(On Request)


Product Features

- Available as manual test/self-test or DALI-2 versions
- Full ISO Legend kit provided
- 30m viewing distance
- Integral downlight built in
- Led exit sign for wall mount applications
- Maintained or non-maintained operation
- Polycarbonate housing
- White or black housing options
- 5 year warranty

Additional Product Details

- | | |
|-------------------------|------------------------------|
| ▪ Product | LED exit sign |
| ▪ Sign viewing distance | 30m |
| ▪ Dimensions | 331mm x 182mm x 47mm (LxWxH) |
| ▪ Cable entry | 20mm drilling points |

Dimensions

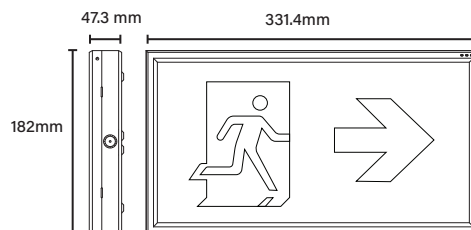

Technical Data

Rated Supply Voltage	220-240VAC
Mains Frequency	50/60Hz
Starting Time	0.5s
Ambient Temperature Ta	5-30°C
Led Colour Temperature	6500K
Insulation Class	Class II
Ip Rating	IP20
Supply Power Max	2.6W
Charge Power (Typical)	1.0W
In-Rush Current	1.5A
In-Rush Current Duration	4ms
Mains Surge Capability (Between L – N)	1KV
Battery	1 x 3.2V 1500Ah LiFePO4
Weight	609g



Order Codes

Description

PRO/MT/ST/WH	Protexa Exit Sign, Manual Test/Self-Test, White
PRO/MT/ST/BL	Protexa Exit Sign, Manual Test/Self-Test, Black
PRO/D2/WH	Protexa Exit Sign, DALI-2, White
PRO/D2/BL	Protexa Exit Sign, DALI-2, Black

Product Standards

EN IEC60598-1	EN IEC61347-1	EN 61000-3-3	EN 55015
EN IEC60598-2-1	EN IEC61347-2-7	EN 61547	ROHS 2.0
EN IEC60598-2-22	EN IEC61347-2-13	EN 62034	DALI standard EN 62386-202
ISO3864-Parts 1&3&4	EN 61000-3-2		